


Dyne pens - non toxic

Dyne test inks are fluids for the quick and easy testing of the surface energy or wetting tension of film, sheet, coated board, inks, coatings and adhesives, as well as testing the surface cleanliness of metals. For this, the ink is applied to the material surface and it will give you fast information about the surface energy level of your materials.

We supply the non toxic ink in the range from 28 to 72 mN/m as either dyne pens, small 10 ml with a 5 mm felt tip, or large 26 ml with a 15 mm felt tip, or as ink in bottles of 10, 50 or 100 ml. The 10 ml bottles have a brush inside the lid. All products are available in either blue or red.

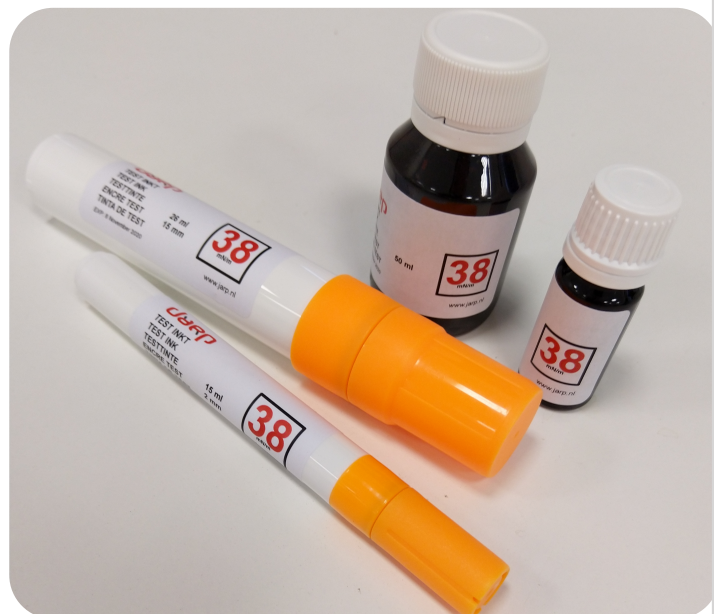

Features

- Available as dyne pens or bottled test inks
- Non toxic formula
- You can order any combination of dyne levels and quantities you require

Technical details

Levels	28 - 72 mN/m
Colours	Blue, red
Pens	Small 10 ml or large 26 ml
Bottles	10, 50 or 100 ml

Standards

ASTM D2578 · ISO 8296 · TAPPI T698